



REMOVING SUPERMOTORS VERSION 08/03/21

1. Remove the clear plastic covers from the motors
2. Unplug the communication cable and separate it from the motor by pulling off the wire tie from the post.

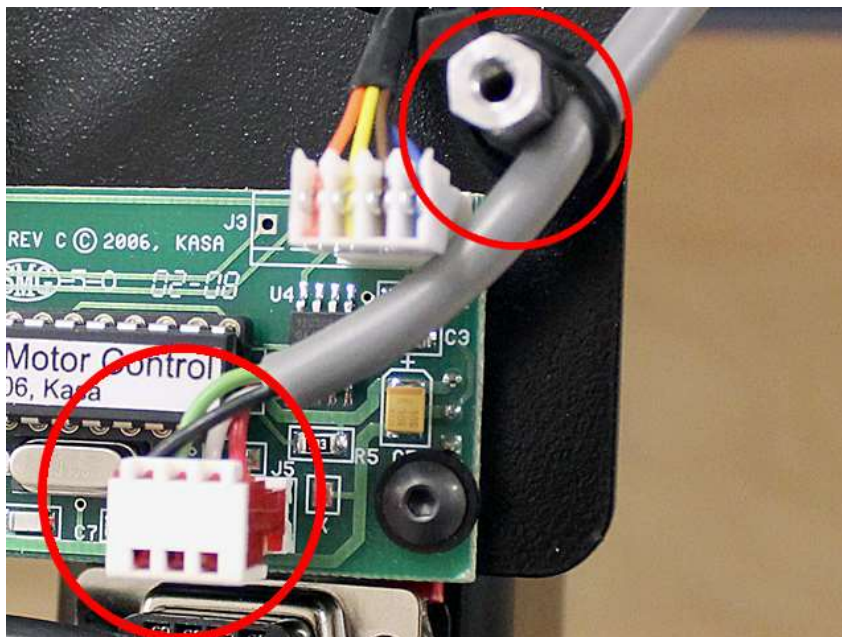

3. Remove the motor from the bracket by removing the two recessed bolts. Put back the bolts in the brackets, do not ship them with the motors.

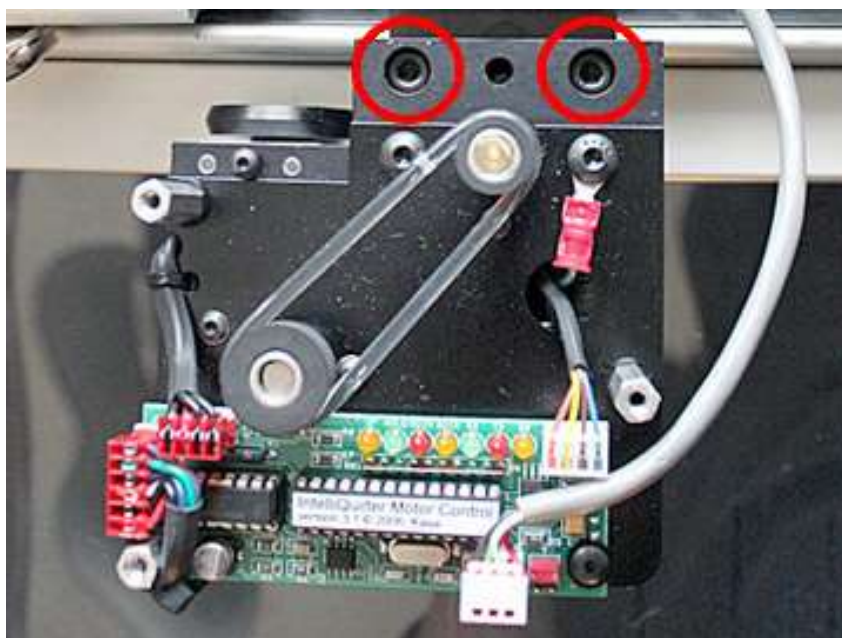

4. Put on their cover and carefully wrap the motors in bubble plastic or batting, package them in a sturdy shipping box and ship them, insured for \$500, using UPS or FedEx Ground to

IntelliQuilter, LLC.
7205 Slate Bend Dr.
Delaware, OH 43015
(614) 439-8608
parts@intelliquilter.com